
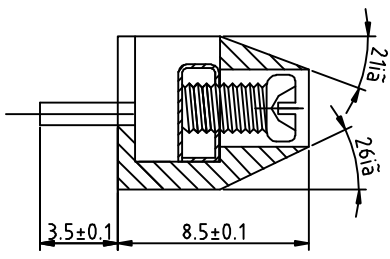
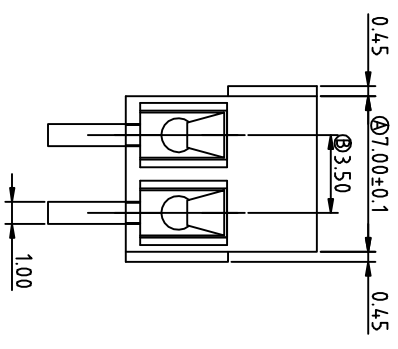


SIGN	DATE	DESCRIPTION	APPROVER
Δ			
Δ			
Δ			



POLE	2P	
A	NX3.5	7.0
B	(N-1) X3.5	3.5

Technical Data:

Material:

- Contact(metal housing): Brass (CuZn)
- Terminal screw: Steel galvanized and chromate or Nickel plated or Tin plated(standard/optian)
- Wire guard: Stainless steel
- Surface of solder tail: tin plated
- Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical

- Voltage rating: 125VAC
- Current rating: 10 Amps/way max
- Contact resistance: 20mΩ(max)
- Insulation resistance: 5000MΩ/1000V
- Withstanding Voltage: 2000VAC(1min) Test time=60sec/1pcs
- Wire range: 16-26AWG

Mechanical:

- Torque: 4kg-cm/M2.0 Operating temperature: -33°C to +120°C
  - Soldering ability: 95%coverage(min)
  - Test temperature= 230°C±10°C  
Test time= 4sec±0.5sec
  - Soldering reliability:  
Test temperature= 250°C±10°C  
5 seconds max
- Safety approval deta:



**杰科电子有限公司**  
JIE KE ELECTRONICS CO., LTD.

PART NAME: JK350-350 2P

TITLE:

PART NO.:

DWG NAME:

APPROVED BY

CHECKED BY

DESIGNED BY

DRAWN BY

CUSTOM NO.:

UNITS: mm  
SCALE: 4/1  
REVISION: A2

Tolerance  
x: ±0.50  
x.x: ±0.30  
x.xx: ±0.10  
xx: ±1°

岑杰

孙学峰

杨丽霞

杨丽霞

