

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

Technical Data:

Material:

● Contact(metal housing): Steel stamping or Zinc Die Casting or Brass Machined(Optional)

● Terminal screw: Steel galvanized and chromazite or Nickel plated or Tin plated (standard) (option)

● Solder Pin: Brass with Tin plated

● Insulator or body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical

● Voltage rating: 300VAC

● Current rating: 10 Amps/way max

● Contact resistance: 20mΩ(max)

● Insulation resistance: 5000MΩ/1000V

● Withstanding Voltage: 1500VAC(1min) Test time=60sec/1pcs

● Wire range: 12-24AWG

Mechanical:

● Torque: 4kgf.cm/M2.5


● Operating temperature: -33°C to +120°C

● Soldering reliability:


Test temperature= 250°C±10°C

5 seconds max

Safety approval data:

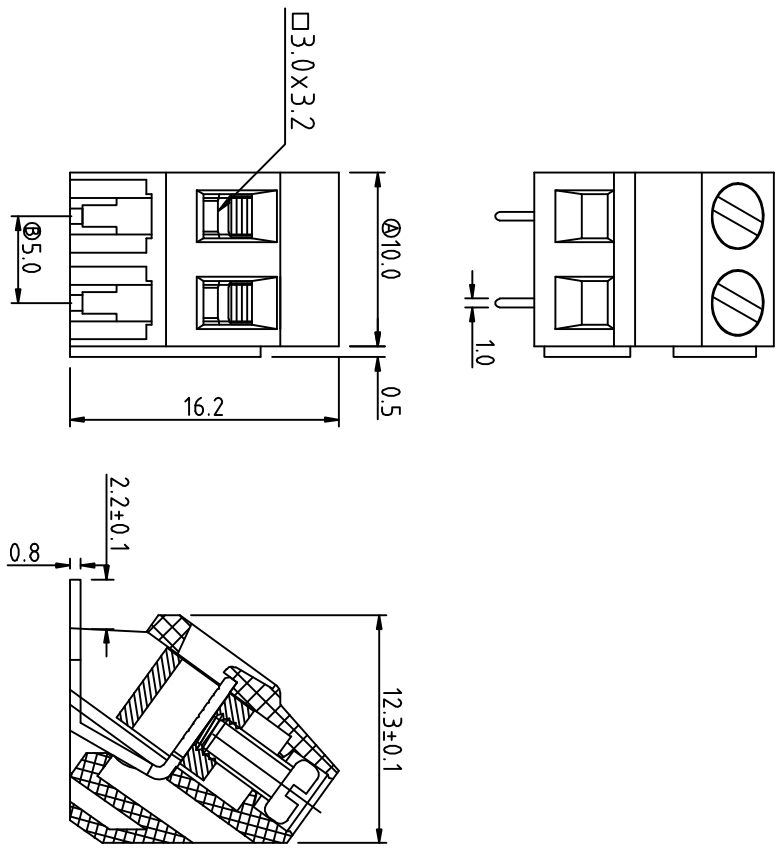

POLE	2P	
A	NX5.0	10.0
B	(N-1) X5.0	5.0



**杰科电子有限公司**  
JIE KE ELECTRONICS CO., LTD.

PART NAME: JK1127R-500 2P

TITLE:

PART NO.:

DWG NAME:

APPROVED BY

CHECKED BY

DESIGNED BY

DRAWN BY

CUSTOM NO.:

Tolerance

岑杰

孙学丰



UNITS: mm  
SCALE: 3/8"=1"  
REVISION: B2

X ±0.50  
XX ±0.30  
XXX ±0.10  
XX° ±1°